Estimate for the work of P & L of 300mm dia RCC NP3 Class sewer line from OTC Road to OK Road along Mari Muniyanna Lane Coming Under Banappa Park S/Stn, area of AEE SW-1 Sub Dvn.

Estimate for the work of P & L of 300mm dia RCC NP3 Class sewer line from OTC Road to OK Road along Mari Muniyanna Lane Coming Under Banappa Park S/Stn, area of AEE SW-1 Sub Dvn.

AEE SW1

S.S

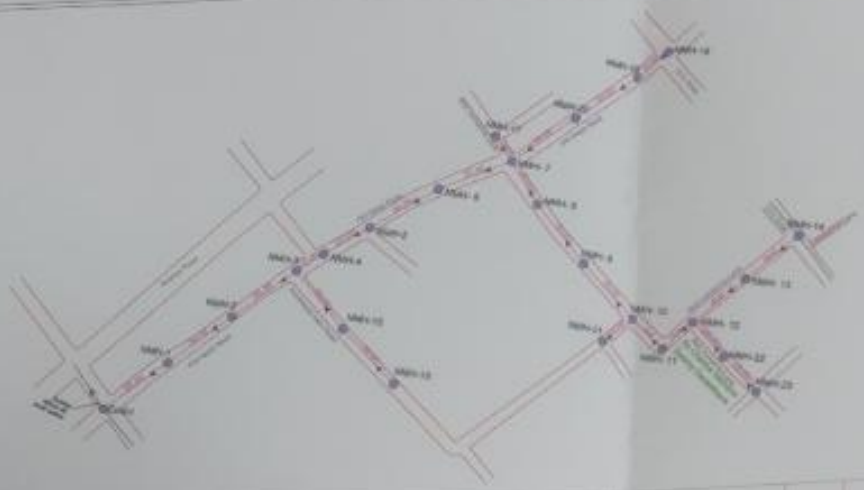

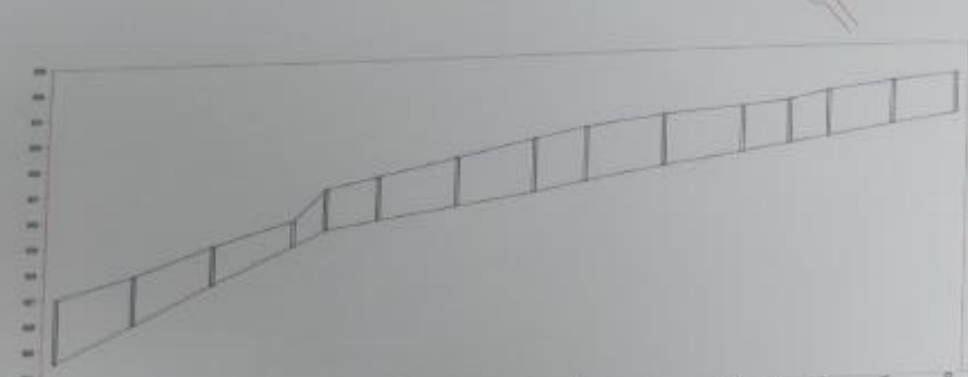

STATION	CHAINAGE	CUMULATIVE CHAINAGE	DEPTH OF CUT	INVERT LEVEL	GROUND LEVEL
DATUM-923.00					
SMH-1	0.00	0.00	2.500	924.500	927.00
1	30.00	30.00	1.500	925.500	927.000
2	30.00	60.00	1.500	927.412	928.912
3	30.00	90.00	1.45	926.806	928.256
4	12.00	102.00	1.450	926.450	927.900
5	30.00	132.00	1.700	926.700	928.400
6	30.00	162.00	1.800	926.150	927.950
7	30.00	192.00	2.100	925.850	927.950
8	30.00	222.00	2.150	925.279	927.429
9	30.00	252.00	2.00	925.429	927.429
10	30.00	282.00	1.800	925.150	926.950
11	19.00	301.00	1.700	925.250	926.950
12	15.00	316.00	1.500	925.443	926.943
13	25.00	341.00	1.700	925.594	927.294
14	15.00	356.00	1.800	925.220	927.020
15	0.00	356.00	1.35	925.800	927.150
16	30.00	386.00	1.35	926.139	927.489
17	30.00	416.00	1.35	926.579	927.929
18	20.00	436.00	1.35	926.579	927.929
19	0.00	436.00	2.35	925.710	928.060
20	0.00	436.00	2.15	926.830	928.980
21	0.00	436.00	1.90	927.330	929.230
22	15.00	451.00	1.90	927.430	929.330
23	30.00	481.00	2.00	927.080	929.080
24	30.00	511.00	2.10	926.910	929.010
25	0.00	511.00	1.70	927.120	928.820
26	15.00	526.00	1.80	927.020	928.820
27	0.00	526.00	1.80	927.443	929.243
28	30.00	556.00	1.90	927.460	929.360
29	30.00	586.00	1.90	927.460	929.360